

For 1 and double-wing / folding doors made from metal, plastic and wood

## Main features


- lift height 16 mm
- unilateral release with parallel drop-down
- does not trail on the floor
- automatic compensation to inclined floors
- even for double-wing doors with flush bolt or driving bar
- acoustic insulation of 50 dB (at 7 mm space to the floor)
- can be shortened to the next shorter length in stock
- high-grade silicone lip, simple lift height adjustment
- warranty 7 years

## Executions

- Planet RO RD/50dB, smoke shielding
- Planet RO FH+RD/50dB, fire-retardant and smoke-shielding
- special executions on request

## Double-wing / folding doors

- refer to chapter Flush bolt | Drilling

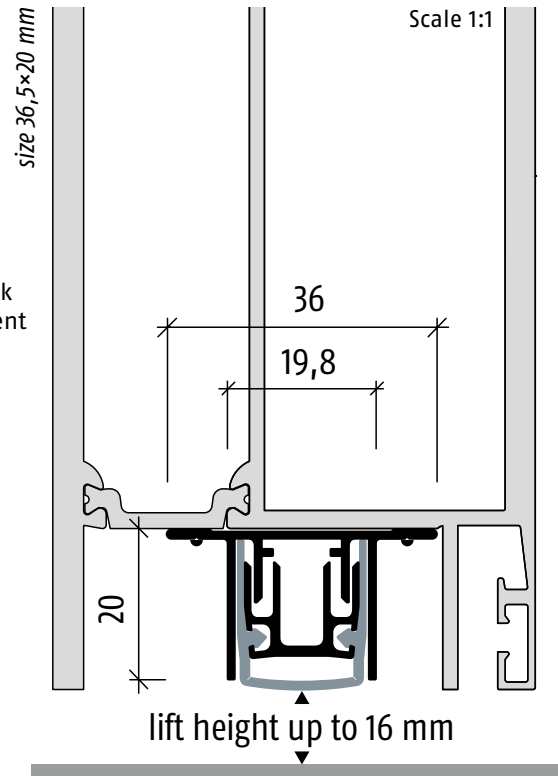

## Advertising text

### Planet RO RD/50dB, smoke-shielding

Automatic door drop-down seal **Planet RO RD/50dB**, for sound absorption and smoke-shielding doors, release on hinge side with automatic compensation in case of an inclined floor, parallel drop-down, seal lift height up to 16 mm. Silicone lip, fastening on the top. Aluminum profile 19,8/36×20 mm.

### Planet RO FH+RD/50dB, fire-retardant and smoke-shielding

Automatic door drop-down seal **Planet RO FH+RD/50dB**, for sound absorption-, smoke-shielding- and fire-retardant doors, release on hinge side with automatic compensation in case of an inclined floor, parallel drop-down, seal lift height up to 16 mm. Self-extinguishing silicone lip, fastening on the top. Aluminum profile 19,8/36×20 mm.

## Technical specifications

Profile material:	aluminum, 19,8/36×20 mm
Seal profile:	high-grade silicone or high-grade self-extinguishing silicone
Seal height / lift height:	up to 16 mm
Sound absorption value:	up to 50 dB at 7 mm space to the floor, up to 43 dB at 16 mm space
Lift height adjustment:	on the release knob with an Allen key 3 mm
Lengths in stock:	335, 460, 585, 710, 835, 960, 1085, 1210, 1335, 1460, 1585 mm
Special lengths:	on request up to 6000 mm
Release:	unilaterally on hinge side
can be shortened:	up to 125 mm
Fastening:	from the bottom with screws available with the customer
Test approvals:	on request

For 1 and double-wing / folding doors made from metal, plastic and wood

## Order specifications

- **Planet R0 RD/50dB**,  
incl. stopping plate, type 1  
Part number 56 xxx\*
- **Planet R0 FH+RD/50dB**,  
incl. stopping plate, type 1  
Part number 57 xxx\*

\*xxx = refer to price list for profile length

## Accessories / options

- **Planet stopping plate**, type 1, stainless  
Part number 900 014
- cut the **Planet to fix dimension**  
Part number 900 200
- **Drill hole 5×13 mm**,  
including plastic guide  
Part number 900 190
- **Drill hole Ø 10,8 mm**  
Part number 900 280
- **Planet BM floor recess plates**  
refer to chapter Flush bolt I BM



Planet R0 profile



Planet R0 with release knob



Planet stopping plate, type 1, stainless



**Option:**  
Planet R0 bevel lip for wavy floors



**Option:**  
Planet R0 with Drill hole 5×13 mm



**Option:**  
Planet R0 with Drill hole Ø 10,8 mm



Planet KR Flush bolt incl. strike plate, refer to chapter Flush bolt | Drill hole.  
**Option:** floor recess plate 5×13 mm, narrow

SWISS MADE