



TECHNICAL SPECIFICATIONS

HR1020-CNSN-52 DOOR LEVER



BARREL SHORT STITCH INRECESS LEATHER HAMMERED IN CHESTNUT AND SATIN NICKEL



CHESTNUT (CN)



SATIN NICKEL (SN)

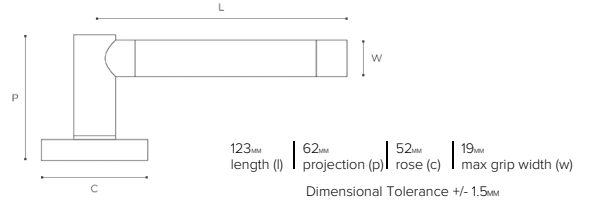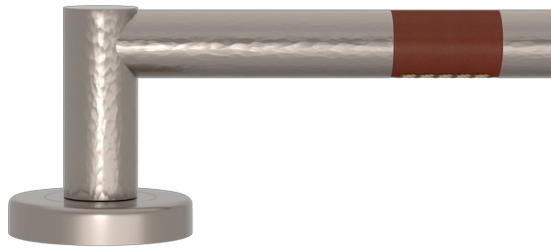

OTHER FINISH OPTIONS

Leather Finishes




CHESTNUT CN | CHOCOLATE CT | BLACK BL | TAN TA | SLATE GREY GC | WHITE (SPECIAL ORDER) BW



BRIGHT CHROME BC | SATIN NICKEL SN | POLISHED NICKEL PN | POLISHED BRASS PU | BURNISHED BRASS BH | BURNISHED NICKEL NH

ROSE / PLATE OPTIONS

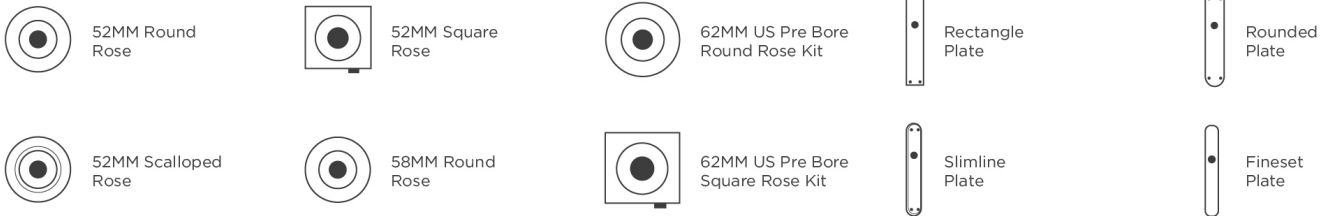

CONFIGURATIONS / FIXINGS

Sprung as standard, unsprung available upon request

Through bolt fixing with M4 X 60mm through bolts (suitable up to door thickness 45mm). Please inform sales if fitting to thicker doors.

8 x 8 x 110mm piercing spindle.