




TECHNICAL SPECIFICATIONS

HS5004-SN-52 DOOR LEVER
BRIDGE SOLID HAMMERED 52 SQUARE IN SATIN NICKEL




SATIN NICKEL (SN)

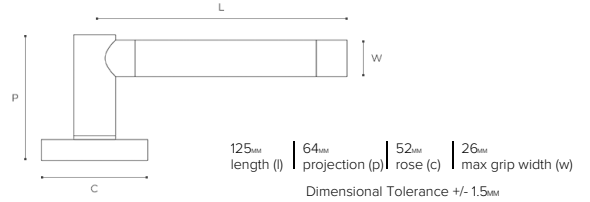

OTHER FINISH OPTIONS



ROSE / PLATE OPTIONS

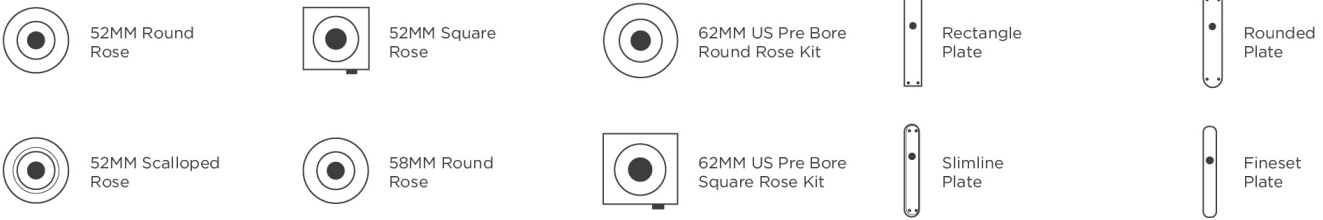

CONFIGURATIONS / FIXINGS

Sprung as standard, unsprung available upon request
Through bolt fixing with M4 X 60mm through bolts (suitable up to door thickness 45mm). Please inform sales if fitting to thicker doors.
8 x 8 x 110mm piercing spindle.