



TECHNICAL SPECIFICATIONS

D1822-APSN-52 DOOR LEVER


BRAIDED CORD COMBINATION AMALFINE IN ALUPEWT AND SATIN NICKEL



ALUPEWT (AP)



SATIN NICKEL (SN)

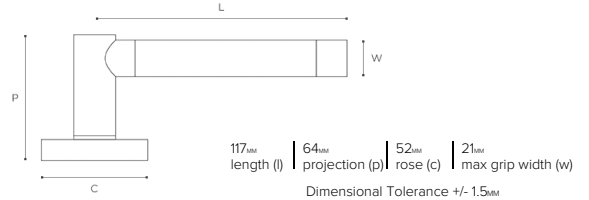

OTHER FINISH OPTIONS

Amalfine Finishes



BLACK BRONZE (BB)

COCOA (CO)

ALUPEWT (AP)

SILVER BRONZE (SB)



BRIGHT CHROME (BC)

SATIN NICKEL (SN)

POLISHED NICKEL (PN)


POLISHED BRASS (PU)

FINE ANTIQUE BRASS (FA)

VINTAGE NICKEL (VN)

VINTAGE PATINA (VP)

ROSE / PLATE OPTIONS

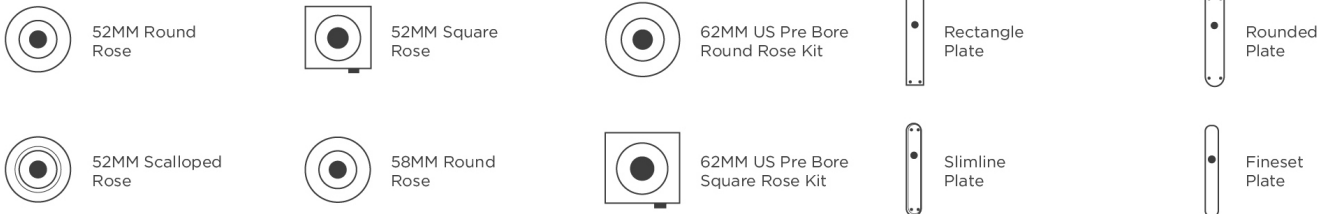

CONFIGURATIONS / FIXINGS

Sprung as standard, unsprung available upon request

Through bolt fixing with M4 X 60mm through bolts (suitable up to door thickness 45mm). Please inform sales if fitting to thicker doors.

8 x 8 x 110mm piercing spindle.